


STANAG LEVEL 2

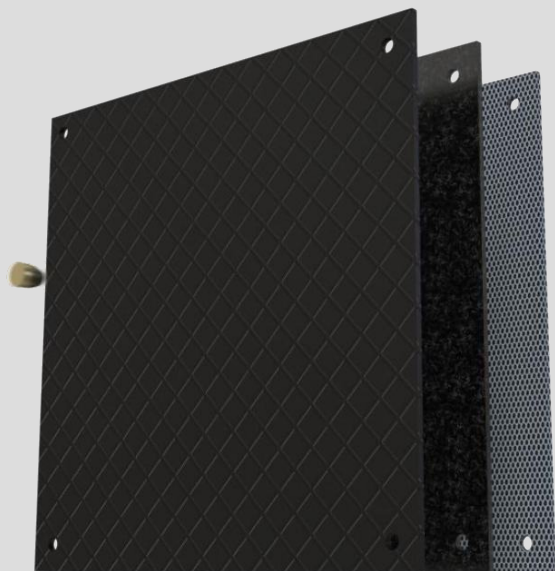

Protection Level 2
according to **STANAG 4569 standard**

Designed for the following threats:

7.62 × 39 API BZ, with a velocity of 695 m/s
at 30 meters.

Fire resistance according to EN 13087-7:2000 standard and
flame resistance according to FED-STD-191 standard,
method 5905.1.

The ballistic panels withstand, without prejudice of their
ballistic protection properties, temperatures between -37 °C
and +51 °C and submersion in salt water for a minimum
period of 3 hours in 1 meter in depth.

The ballistic panels have high resistance to corrosion caused
by diesel, gasoline, motor oil, hydraulic fluids, JP-8 aviation
fuel, oil for cleaning and maintenance of weapons, insect
repellent and facial paint.

Ballistic panel with the possibility of incorporating a
decorative phenolic according to the customer's preferences.

**These rigid panels take in consideration new developments
in different areas, namely multi-scale materials with high
energy absorption.**

The ballistic panels are covered with 10 years guarantee.



**BEYOND
COMPOSITE**

SONAE Campus
Lugar do Espido, Via Norte
4470-177 Maia
Portugal

www.beyondcomposite.com
geral@beyondcomposite.com
+351 221 104 798

Properties	Obtained Values
Weight (Kg/m ²)	55
Thickness (mm)	21 (steel + composite)