


# STANAG LEVEL 4

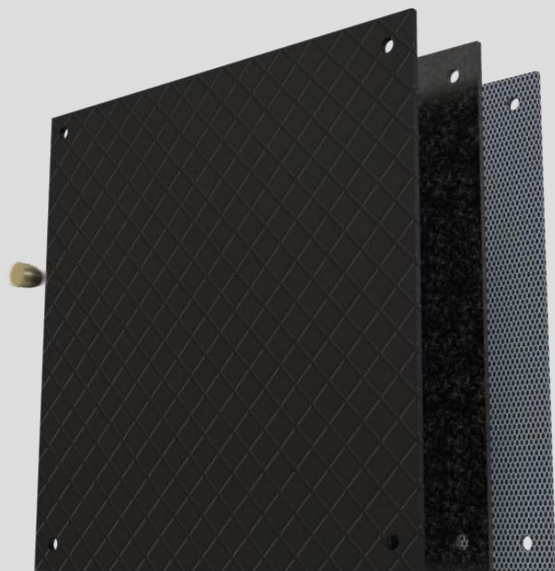

Protection Level 4  
according to **STANAG 4569 standard**

Designed for the following threats:

**14.5 × 114 AP / B32**, with a velocity of 911 m/s at 200 meters.

Fire resistance according to EN 13087-7:2000 standard and flame resistance according to FED-STD-191 standard, method 5905.1.

The ballistic panels withstand, without prejudice of their ballistic protection properties, temperatures between -37 °C and +51 °C and submersion in salt water for a minimum period of 3 hours in 1 meter in depth.

The ballistic panels have high resistance to corrosion caused by diesel, gasoline, motor oil, hydraulic fluids, JP-8 aviation fuel, oil for cleaning and maintenance of weapons, insect repellent and facial paint.

Ballistic panel with the possibility of incorporating a decorative phenolic according to the customer's preferences.

**These rigid panels take in consideration new developments in different areas, namely multi-scale materials with high energy absorption.**

**The ballistic panels are covered with 10 years guarantee.**



**BEYOND  
COMPOSITE**

SONAE Campus  
Lugar do Espido, Via Norte  
4470-177 Maia  
Portugal

www.beyondcomposite.com  
geral@beyondcomposite.com  
+351 221 104 798

Properties	Obtained Values
Weight (Kg/m <sup>2</sup> )	123
Thickness (mm)	15 (ceramic) + 8 (compactshield) + 7 (steel)